



HIRSCHMANN

A **BELDEN** BRAND

WLAN Access Point BAT300-Rail



**New: the first industrial
WLAN access point with
802.11n modem – for abso-
lutely reliable use with
high bandwidth coverage
in harsh environments.**



WLAN Access
Point



HIRSCHMANN

A BELDEN BRAND

Faster, better and more rugged: the new BAT300-Rail with 802.11n modem.

The BAT300-Rail WLAN access point, in combination with the 802.11n transceiver, creates the platform for the next WLAN generation in industrial environments. Using all new technology, the new BAT immediately achieves enhanced performance and bandwidth – even under extremely challenging conditions. Hirschmann™, for the first time, has achieved WLAN performance that eclipses that of Fast Ethernet, while offering an absolutely future-proof, wireless transmission solution with even better coverage.

- Higher radio performance with a bandwidth of up to 300Mbps
- New antenna technology that increases bandwidth (MIMO and multipath) via reflection
- Clear improvement in bandwidth and ruggedness – especially in industrial environments

3 antennas for transmitting and receiving

WLAN access point for DIN rail mounting

Rugged metal case, extended temperature range, high resistance to vibration and interference

Secure operation thanks to 5-times redundant power supply (24V, PoE acc. 802.3af, 12V)

Maximum security: IEEE 802.11i/PSK and IEEE 802.11i/Enterprise

High bandwidth with WLAN acc. 802.11n, operation in 2.4GHz or 5GHz, can also be used in mixed 802.11a/b/g/h networks

Extremely powerful operating system with integrated IP router, firewall, RADIUS server and 802.1x authentication

Integrated serial gateway

Remote configuration and access via V.24 and DSL






A clear signal for the future: the new 802.11n transmission standard.

With the BAT300-Rail, Hirschmann™ is introducing the first product with 802.11n transceiver to the industrial market.

The new technology is especially impressive in industrial environments afflicted with a high degree of reflection, where – contrary to previous WLAN technologies – reflection can, for the first time, ensure a significant increase in bandwidth and ruggedness. 11n technology offers clear benefits in terms of improved transmission characteristics

and better transmission security. And, thanks to the device's low consumption, the 802.3af Power over Ethernet Standard can also be used.

Through the first-time application of state-of-the-art 802.11n technology in an industrial-strength access point, Hirschmann™ is opening up all new perspectives in wireless signal transmission in industrial environments. BAT300-Rail is the precursor for a new product family from the Hirschmann™ WLAN experts.

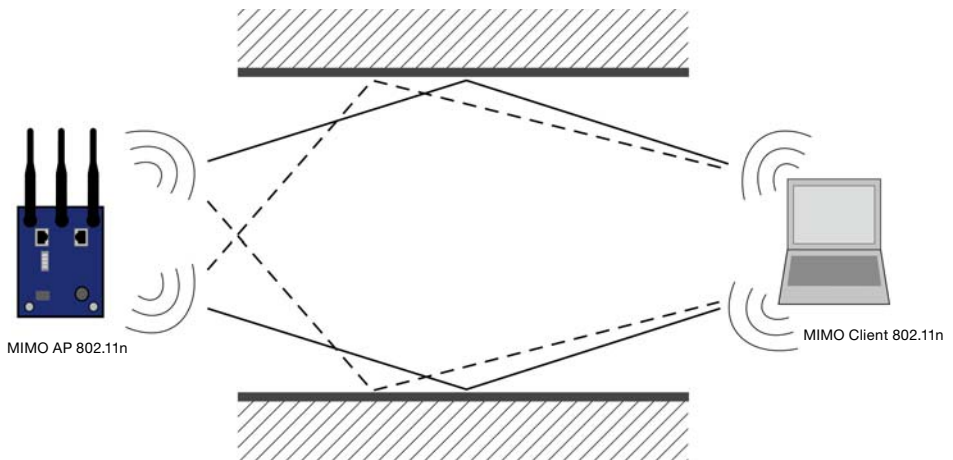


With MIMO (Multiple Input Multiple Output) technology, several transmission and reception antennas are used from the transmitter and receiver, to increase performance and bandwidth.

MIMO (Multiple Input Multiple Output)

- Use of multipath transmission with reflection
- 3 antennas for transmission and reception ensure more stable network coverage with less shadow areas
- Use of 20 MHz or 40 MHz wide channels

Thanks to its compact design, the new BAT300-Rail can be used flexibly on any DIN mounting rail and is PoE-compliant as standard.

Moreover, this access point fits easily in Fast Ethernet networks without the need for an upgrade.

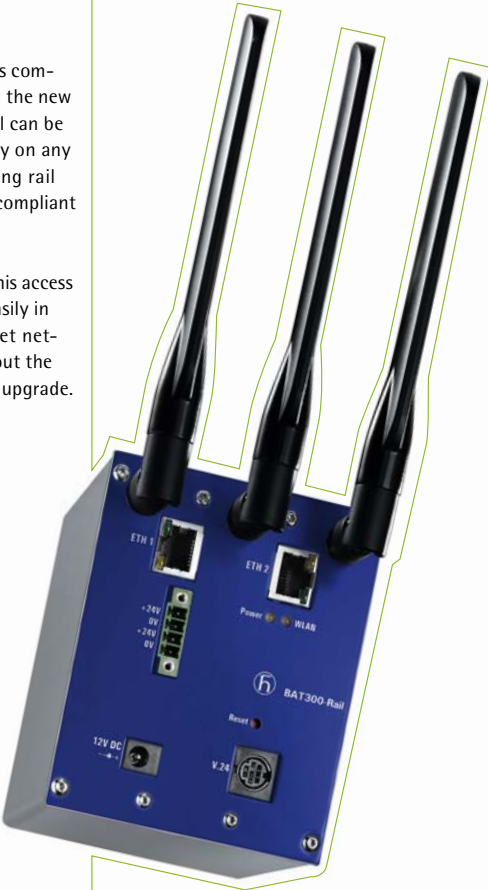



GLOBAL LOCATIONS

For worldwide Industrial Sales
and Technical Support, visit:
www.belden.com/industrial



EUROPE

Headquarters – Germany

Hirschmann Automation
and Control GmbH

Phone: +49 7127 14-0

Fax: +49 7127 14-1542

INET-sales@hirschmann.de

[web: www.hirschmann.com](http://www.hirschmann.com)

Regarding the details in this brochure: The information/details in this publication merely contain general descriptions or performance factors which, when applied in an actual situation, do not always correspond with the described form, and may be amended by way of the further development of products. The desired performance factors shall only be deemed binding if these are expressly agreed on conclusion of the contract. Please note that some characteristics of the recommended accessory parts may differ from the appropriate product. This might limit the possible operating conditions for the entire system.