



Vololink

the future is wireless

VoloFone™ VF100

Fixed Wireless Terminal



GETTING STARTED GUIDE

INTRODUCTION

This *Getting Started Guide* provides information on how to install and configure your VoloFone™ VF100 Fixed Wireless Terminal.

For further information about your VoloFone™, please refer to the User Manual on the enclosed CD.

PACKING LIST

- VoloFone™ VF100
- Base
- Backup Battery (Optional)
- Power Supply and Cable
- Ethernet cable
- RJ11 Telephone Cable
- Antenna
- CD (Contains the User Manual)

Check that all components are included. If any item is missing or damaged, please contact the retailer or service provider where you purchased the VoloFone™ VF100.

INSTALLATION

System Requirements

To install your VoloFone™ VF100 the following items are required:

- A USIM card. Make sure that your service provider supplies the PIN code and APN (Access Point Name). The APN is required to configure broadband access on your VoloFone™.
- A Computer fitted with an Ethernet network connector and a Web browser for configuring the unit.

Installing the VoloFone™ VF100

⚠ Before attempting to install the USIM card, ensure the power is NOT connected.

Install the USIM card.


- Turn the VoloFone™ over to reveal the USIM slot.
- Insert the USIM card with the cut corner facing the front of the VoloFone™.
- Gently press the USIM card into the slot. You will feel a click as the card seats.



Connect the Antenna

- Connect the antenna to the **RF** connector on the back of the VoloFone™ and tighten.

Connect to a Computer

- Connect the Ethernet cable to the **LAN** connector on the back of the VoloFone™.
Connect the other end to the **LAN** connector (usually marked like this: ) on the computer.



Connect a Telephone

- Connect a telephone using the supplied RJ11 cable to the **PHONE** connector on the back of the VoloFone™.



Connect the Power Supply


- Connect the Power Supply to the **POWER** connector on the back of the VoloFone™. Connect the power cord to the wall outlet.

Power up the VoloFone™ VF100

- Check all of the connections defined above are secure, then switch the power on at the wall outlet.
- All lights on the VoloFone™ will display orange for a short time followed by a light chaser sequence of green and red involving the lights from the Power light () to the Mobile Network Connection light ().
- After the Power Up sequence has completed, the VoloFone™ will go into Normal operation mode.
- Look at the Mobile Network Connection light. If it is:
 - a) Solid Red – SIM is missing or locked. Check that the SIM card is inserted correctly. You can unlock the SIM using the telephone keypad. Enter the SIM PIN followed by # then replace the handset. The Mobile Network Connection light should then go into one of the following states:
 - b) Flashing Green – Your VoloFone™ is fully configured for voice, SMS and broadband services. Flashing at one second intervals indicates connection to a GPRS/EDGE network and 200 milliseconds interval, a UMTS/HSDPA network.
 - c) Solid Green – Broadband configuration required. Voice and SMS services are available.

Configuring the VoloFone™ VF100 for Broadband Services

-  If your VoloFone™ VF100 was purchased as a packaged unit from a service provider including a configured USIM, you do not need to configure the unit. You can now load your favourite browser and surf the Internet.
- Load the Administration Web page by opening the Web browser on the computer connected to the VoloFone™ VF100, then type **http://192.168.0.1** in the address line and press **Enter**. The VoloFone™ **Login** dialog appears:
-  If the Login dialog does not appear, check that **Obtain an IP address** and **Obtain DNS Server** are both set to **automatic** in the **TCP/IP** settings in the computer.
- Type the User name **admin**
- Type the Password **password**
- Click the **OK** button. The VoloFone™ **Index** page appears.
- Click **VoloAdmin**. The VoloAdmin™ **Status** page appears.

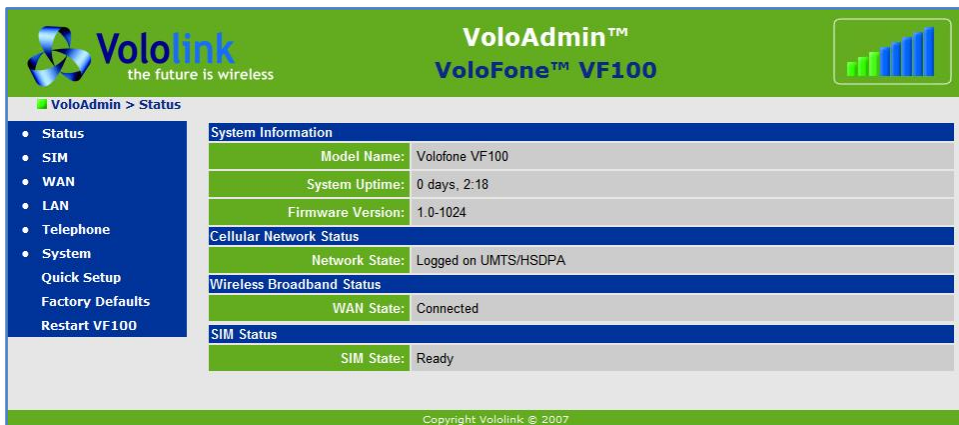

Vololink the future is wireless

VoloAdmin™
VoloFone™ VF100

VoloAdmin > Status

- Status
- SIM
- WAN
- LAN
- Telephone
- System
- Quick Setup
- Factory Defaults
- Restart VF100

System Information	
Model Name:	Volofone VF100
System Uptime:	0 days, 2:18
Firmware Version:	1.0-1024


Cellular Network Status	
Network State:	Logged on UMTS/HSDPA

Wireless Broadband Status	
WAN State:	Connected

SIM Status	
SIM State:	Ready

Copyright Vololink © 2007

- In the navigation panel click **Quick Setup**. The **Quick Setup** page is displayed.

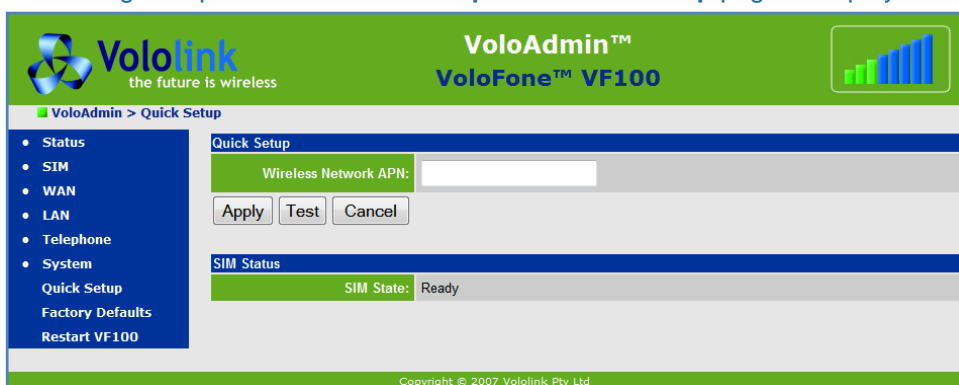

Vololink the future is wireless

VoloAdmin™
VoloFone™ VF100

VoloAdmin > Quick Setup

- Status
- SIM
- WAN
- LAN
- Telephone
- System
- Quick Setup
- Factory Defaults
- Restart VF100

Quick Setup	
Wireless Network APN:	<input type="text"/>
<input type="button" value="Apply"/> <input type="button" value="Test"/> <input type="button" value="Cancel"/>	

SIM Status	
SIM State:	Ready

Copyright © 2007 Vololink Pty Ltd

- Enter the **APN** in the editbox provided and click the **Apply** button.
Your VoloFone is now ready to use. You can begin surfing the Internet.