



DT590

Cordless Telephone for Ericsson MX-ONE™
Telephony Switch and Ericsson MD110

Quick Reference Guide

This Quick Reference Guide includes short descriptions on how to use the basic features. To learn more about all available functions and features, please see the related User Guide.

Switching On/Off

- Switch on: (Until display on)
- Switch off: (Until display blank)
- Open key lock: *

Free Seating¹

- Log on: * 1 1 * Authorization code *
Own ext. No. #
- Log off: # 1 1 #

Answer Calls

- Answer:
- Handsfree:
- On another ext. (Call pick-up): Call ringing ext. 8
France: 4; Sweden: 6
- End call:

Make Calls

- Make call: Ext. No. or External line and No.
- Handsfree: Dial No.
- Common Speed Dialing number: Dial Speed Dialing No.
- Make a quick call via the Phone book: Press and hold first character of name (Until name is displayed)
- Make a call via the Phone book: Enter characters in name (Until name is displayed)
- Dial number from the Call list: (Until name is displayed)
- Last External Number Redial: * * * Finland, Sweden: * * 0



The complete User Guide is available in electronic format on the Enterprise Telephone Toolbox CD and on <http://www.ericsson.com/enterprise/library/manuals.shtml>

Inquiry

- Ongoing conversation: ("3rd Party", "Call 3rd party") or Call 3rd party
- Refer back: ("3rd Party", "Switch call") or 2
Sweden: R
- Return and finish Inquiry: ("3rd Party", "End new call") or

Transfer

- Ongoing conversation: ("3rd Party", "Call 3rd party") or Call 3rd party (Before or after answer)

Conference

- Ongoing conversation: ("3rd Party", "Call 3rd party") or Call 3rd party ("Add to conf.") or 3

Callback

- Activate: ("User busy", "Call back") or 6
Finland, France, Sweden: 5
- Cancel single Callback: # 3 7 * Ext. No. #
- Cancel all: # 3 7 #

Call Waiting

- Activate at busy tone: ("User busy", "Call waiting") or 5
Wait on line. Finland, France: 6; Sweden: 4

Loudspeaking (Handsfree)

- Activate/Deactivate:


General Deactivation

- Cancel all activated features: # 0 0 1 #


Voice Activated Assistant (VAA)¹

- Access to VAA: (Hold for more than two seconds)
Follow recorded instructions

Idle menu structure

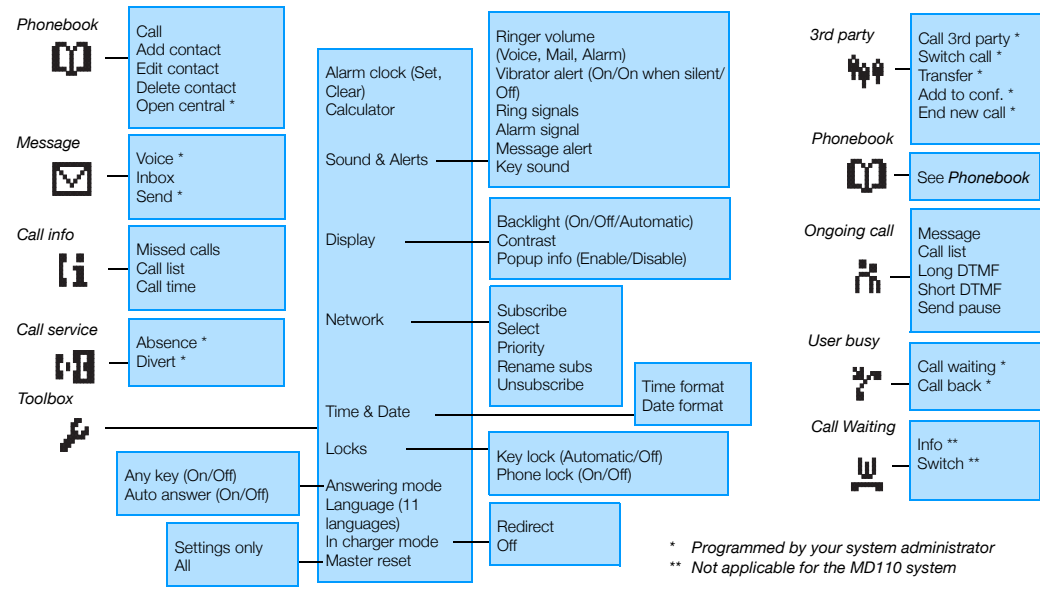

Off hook menu structure

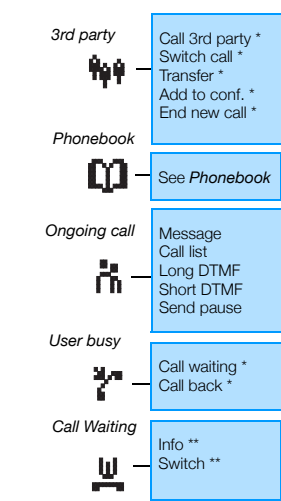

* Programmed by your system administrator
** Not applicable for the MD110 system

On hold

- Put a call on hold:
- Resume call: (Within 30 seconds)
- Resume on another extension: Call ext. where call was put on hold 8
France: 4; Sweden: 6

Diversion¹

- Activate or Deactivate: ("Call service", "Divert")
Select answering position

Internal Follow-me

- Order from your own extension: * 2 1 * New ext. No. # U.K.: * 2 *
- Cancel: # 2 1 # U.K.: # 2 #

External Follow-me

- Order: * 2 2 # External line code and No. #
- Cancel: # 2 2 #

Personal Number¹

- Activate or change profile from own extension: * 1 0 * (1-5) #
- Cancel: # 1 0 #

Ericsson Enterprise AB. All rights reserved. Subject to alteration without prior notice. For more information, please contact your Ericsson Enterprise certified sales partner.

Text messages (SMS)

- (This function is system dependent)
- Receive SMS: ("Message", "Inbox") Find message
- Send SMS: ("Message", "Send") Write message Ext. No.

Voice Mail¹

- Enter your mailbox: Dial voice mail No. and follow recorded instructions
- Receive message: Follow recorded instructions (Access via message key is programmed by your system administrator)

Absence Information¹

- Order: ("Call service", "Absence", "Activate") or * 2 3 * Absence code
- With return date/time: * Date/Time # (Date sequence is system dependent)
- Without return date/time: #
- Cancel: ("Call service", "Absence", "Deactivate") or # 2 3 #

Abbreviations and Explanations

Ext. No. Extension Number 1 Optional