

Tone Ringer Character

- 1. Access menu
- 2. Select type of call
- 3. Select sound 1-4 or 1 (ringer melody)
- 4. Press a volume key to listen
- 5. Confirm selection

Display Settings

- Access menu
- Light
- Language
- Contrast

Key Lock

- Lock
- Unlock (Keylock is displayed)

Phone Lock

- Access menu
- Lock/Unlock
- To use when locked


Symbol Explanations

- Scroll up
- Scroll down
- Scroll up or down
- Scroll to a specific menu
- Press repeatedly the key as many times as shown
- Press one of key 0-9

Volume Control

- Tone ringer volume
- Earpiece volume
- Turn off the ringer when ringing
- Discreet ringing
- 1. Access menu
- 2. Select On or Off

Menu Structure

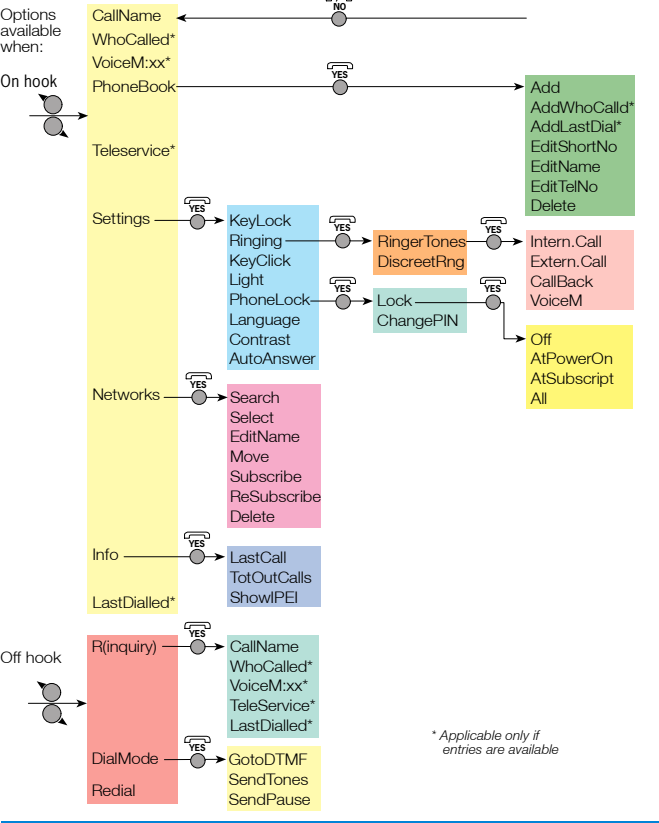

DT368

Cordless Telephone for MD110

Quick Reference Guide



Switch On/Off

Switch on

ON/AUTE OFF (Press until the display lights up)

Switch off

ON/AUTE OFF (Press until the display turns blank)

Free Seating*

Logon

* 11 * Individual auth. code * Ext. # YES NO

Logoff

11 # YES NO

Answer Calls

Answer

YES

Answer for another extension (Call pick-up)

Call the ringing extension 8 TUV

Note! In France: 4 GHI, in Sweden: 6 MNO

Make Calls

Normal calls

Dial number YES

Common abbreviated number

Dial abbreviated number YES

Individual abbreviated number

(1-9) YES

Call by name (example: Eva)

2x 3 DEF 8 TUV YES YES

Quick call by name (example: Bob)

2 ABC (Keep pressed for appr. 1 sec.) 2 ABC (Press quickly) YES YES

Last external number redial

* * * YES

Note! In Finland and Sweden: * * 0 YES

One of last 20 numbers redial

select LastDialled YES YES

Who called

select WhoCalled YES YES

During Connected Calls

End call

NO

Mute alt. 1

ON/AUTE OFF (Keep pressed)

Mute alt. 2 activate/cancel

ON/AUTE OFF (Press quickly)

Dial digits

9 WXYZ Dial digits Note! In Finland: 1

On Hold

Put on hold

R NO

Resume call

YES

Resume call that was put on hold on another telephone

Call the extension where the call was put on hold 8 TUV

Note! In France: 4 GHI, in Sweden: 6 MNO

Inquiry

Ongoing conversation

R Call the 3rd party

2 ABC Note! In Sweden: R

Refer back

R NO YES

Return to first party

Transfer

Ongoing conversation

R Call the 3rd party (Press before or after answer)

Conference

Ongoing conversation

R Call the 3rd party 3 DEF (Press after answer)

When Busy Tone or No Answer

Callback

6 MNO NO YES

Note! In France, Finland and Sweden: 5 JKL NO YES

Cancel individual Callback

37 * Ext. # YES NO

Cancel all Callbacks

37 # YES NO

Activate Call waiting

5 JKL (At busy signal) 6 MNO 4 GHI

Note! In France and Finland: , in Sweden:

Call Forwarding

Personal number*

Cancel

* 10 * (1-5) # YES NO

10 # YES NO

Bypass diversion

* 60 * Ext. # YES

Follow-me

Cancel

* 21 * New ext. # YES NO

21 # YES NO

Note! In U.K. * 2 * and # 2 # are used for Follow-me

External follow-me

Cancel

* 22 # External code/No. # YES NO

22 # YES NO

Absence Information*

Activate

* 23 * Cause * HHMM/MMDD # YES NO

YES NO

Cancel

23 # YES NO

Voice Mail*

Entering your mailbox In general

When is shown

Dial Voice Mail number YES Follow recorded instructions

select VoiceM YES Follow recorded instructions

Phone Book

Enter letters, digits, etc.

Press a key repeatedly until the wanted letter, digit, etc., is shown in the display.

Key	Characters	Key	Characters
1	Space - ? ! , . : " ' () 1	7	P Q R S B 7
2	A B C A A A A A A A C 2	8	T U V U U U 8
3	D E F E E E E 3	9	W X Y Z Y 9
4	G H I I I I 4	0	0 + & @ / \$ % £ € \ ± ½
5	J K L 5	*	x
6	M N O N O O O O O 6	#	# * < = > ^ _ ° 4 2 1

Example: SMITH

Correction

Space, hyphen(-)

Lower/upper case

Add Individual Abbreviated Number

1. Access menu

select PhoneBook YES select Add YES

2. Enter name (example: Eva)

2x 3 DEF 3x 8 TUV 1x 2 ABC YES

3. Enter number

Enter number YES

4. Select key 0-9

YES

Add from WhoCalled or LastDialled Lists

1. Access menu

select PhoneBook YES select AddWhoCalled or LastDial YES

2. Find wanted name or number

YES

3. Enter or edit name

Enter letters YES

4. Select key 0-9

(if no key, select -) YES

Change Abbreviated Number Key

1. Access menu

select PhoneBook YES select EditShortNo YES

2. Enter first letters and scroll to name

Enter letters YES YES

3. Select new key

(if no key, select -) YES

Edit Name or Number

1. Access menu

select PhoneBook YES select EditName or EditTelNo YES

2. Enter first letters and scroll to name

Enter letters YES YES

3. Remove letters or digits

YES

4. Enter new letters or digits

Enter letters or digits YES

Delete Name and Number

1. Access menu

select PhoneBook YES select Delete YES

2. Enter first letters and scroll to name

Enter letters YES YES

3. Delete

YES

*Optional

Note! Ext. = Extension No.